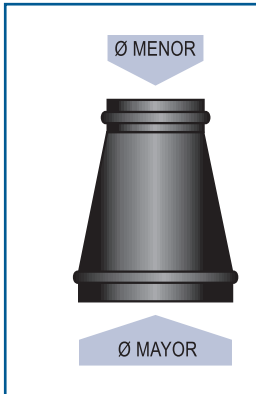


REDUCCIONES • Galvanizado


Ø Mayor (mm.)	Ø Menor (mm.)			
	100-125-150 P.V.P.	200-250-300 P.V.P.	355-400-450 P.V.P.	500-560-600-630 P.V.P.
100	-	-	-	-
125	17,77	-	-	-
150	17,77	-	-	-
200	23,08	-	-	-
250	28,34	24,82	-	-
300	33,43	26,94	-	-
355	40,31	31,21	-	-
400	49,03	37,95	36,74	-
450	49,03	47,73	45,88	-
500	-	47,73	45,88	-
560	-	63,59	52,00	-
600	-	63,59	61,33	61,33
630	-	-	68,56	68,56
710	-	-	75,78	75,78

VARIOS • Galvanizado


*Se puede motorizar

Bifurcación a 45°		Regulador Manual		Compuerta Anti-Retorno		Pico Flauta con Malla	
Diámetros (mm.)	P.V.P.	Diámetros (mm.)	P.V.P.	Diámetros (mm.)	P.V.P.	Diámetros (mm.)	P.V.P.
100	43,23	100	32,91	100	24,90	100	34,61
125	44,40	125	33,28	125	26,51	125	37,63
150	48,48	150	33,66	150	29,82	150	42,16
200	55,48	200	40,22	200	49,36	200	45,04
250	65,85	250	46,68	250	57,63	250	52,01
300	78,57	300	57,99	300	84,79	300	58,35
355	96,44	355	65,54	355	91,49	355	61,84
400	116,50	400	73,79	400	-	400	72,25
450	132,78	450	-	450	-	450	75,98
500	143,48	500	-	500	-	500	78,74
560	156,10	560	-	560	-	560	81,23
600	199,76	600	-	600	-	600	84,30
630	-	630	-	630	-	630	-
710	-	710	-	710	-	710	-